


二路功分器 -0°


频率 范围 (GHz)	插入 损耗 (dB) MAX.	隔离 (dB) MIN.	幅度 平衡 (dB) MAX.	相位 平衡 (Deg) MAX.	VSWR MAX.	输入 功率 (WATTS) MAX. ¹	P/N
0.225-0.4	0.2	22	0.2	2.0	1.5	30	OPD2-01-02/N
0.225-0.4	0.2	25	0.2	2.0	1.5	30	OPD2-01-02/S
0.25-0.5	0.2	22	0.2	2.0	1.5	30	OPD2-02-02/N
0.25-0.5	0.2	22	0.2	2.0	1.5	30	OPD2-02-02/S
0.4-1.0	0.4	18	0.2	2.0	1.5	30	OPD2-03-02/N
0.4-1.0	0.4	18	0.2	2.0	1.5	30	OPD2-03-02/S
0.8-1.0	0.3	23	0.3	2.0	1.5	30	OPD2-04-02/N
0.8-1.0	0.3	23	0.3	2.0	1.5	30	OPD2-04-02/S
0.95-1.225	0.3	22	0.3	2.0	1.5	30	OPD2-05-02/N
0.95-1.225	0.3	22	0.3	2.0	1.5	30	OPD2-05-02/S
0.50-2.0	0.6	18	0.2	4.0	1.5	30	OPD2-06-01/N
0.50-2.0	0.6	22	0.2	2.0	1.5	30	OPD2-06-01/S
1.0-2.0	0.3	22	0.2	3.0	1.5	30	OPD2-07-01/N
1.0-2.0	0.3	22	0.2	3.0	1.5	30	OPD2-07-01/S
0.8-2.2	0.4	20	0.2	3.0	1.5	30	OPD2-23-01/S
0.8-2.5	0.5	20	0.3	4.0	1.5	30	OPD2-25-01/S
1.5-3.0	0.3	20	0.2	2.0	1.5	30	OPD2-08-03/N
1.5-3.0	0.3	20	0.2	2.0	1.5	30	OPD2-08-03/S
0.5-4.0	0.5	16	0.3	4.0	1.5	30	OPD2-21-03/S
1.0-4.0	0.4	20	0.2	5.0	1.5	30	OPD2-09-03/N
1.0-4.0	0.4	20	0.2	5.0	1.5	30	OPD2-09-03/S
2.0-4.0	0.4	20	0.2	3.0	1.5	30	OPD2-10-03/N
2.0-4.0	0.4	20	0.2	3.0	1.5	30	OPD2-10-03/S
3.625-4.25	0.3	21	0.2	2.0	1.5	30	OPD2-11-03/N
3.625-4.25	0.3	21	0.2	2.0	1.5	30	OPD2-11-03/S
0.5-6.0	0.6	18	0.3	4.0	1.5	30	OPD2-22-03/S
5.8-6.45	0.3	21	0.2	2.0	1.5	30	OPD2-12-03/N
5.8-6.45	0.3	20	0.2	2.0	1.5	30	OPD2-12-03/S
0.5-8.0	1.0	18	0.5	5.0	1.5	30	OPD2-27-03/S
2.0-8.0	0.4	17	0.3	6.0	1.5	30	OPD2-13-03/N
2.0-8.0	0.4	20	0.3	4.0	1.5	30	OPD2-13-03/S
4.0-8.0	0.4	18	0.2	4.0	1.5	30	OPD2-14-03/N

二路功分器 -0°


外形图

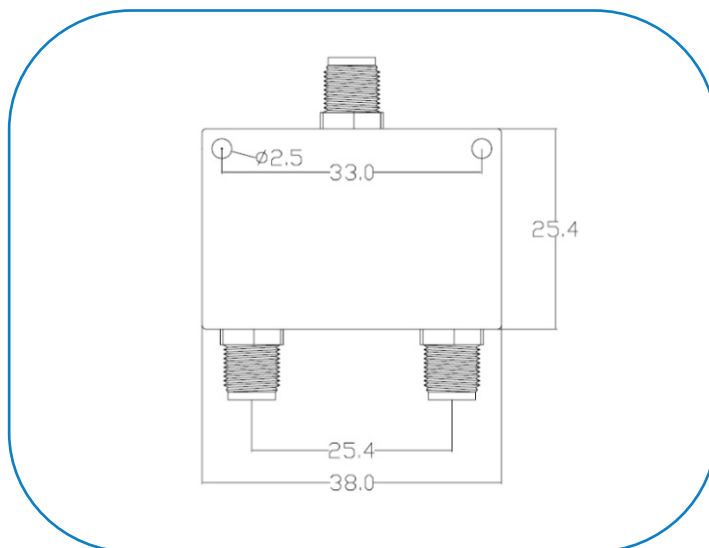

01

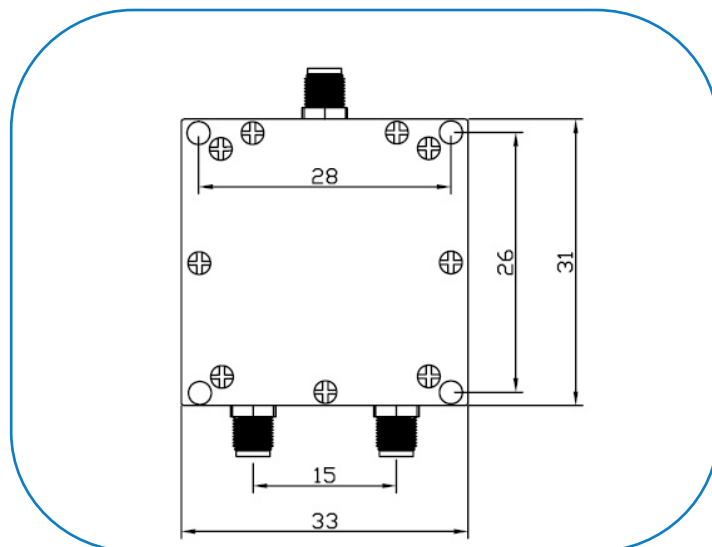

02

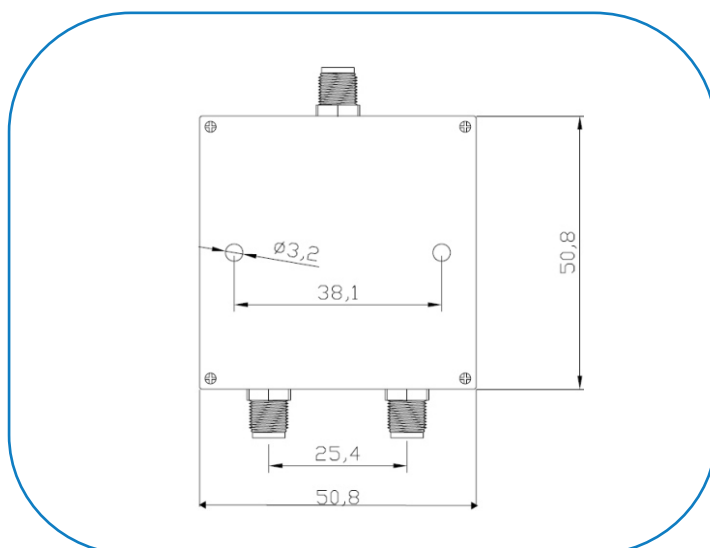


03

四路功分器 -0°

频率范围 (GHz)	插入损耗 (dB) MAX.	隔离 (dB) MIN.	幅度平衡 (dB) MAX.	相位平衡 (Deg) MAX.	VSWR MAX.	输入功率 (WATTS) MAX.	接头	P/N
0.5-1.0	0.9	20	0.4	5.0	1.50:1	30	N	OPD4-01-01/N
0.5-1.0	0.9	22	0.4	5.0	1.50:1	30	SMA	OPD4-01-01/S
0.5-2.0	1.3	18	0.4	6.0	1.50:1	30	N	OPD4-02-01/N
0.5-2.0	1.3	20	0.4	6.0	1.50:1	30	SMA	OPD4-02-01/S
1.0-2.0	0.8	18	0.4	6.0	1.40:1	30	N	OPD4-03-01/N
1.0-2.0	0.8	20	0.4	6.0	1.40:1	30	SMA	OPD4-03-01/S
0.8-2.2	1.0	20	0.4	6.0	1.40:1	30	SMA	OPD4-18-01/S
0.5-2.5	1.3	18	0.4	6.0	1.50:1	30	N	OPD4-04-01/N
0.5-2.5	1.3	20	0.4	6.0	1.50:1	30	SMA	OPD4-04-01/S
0.8-2.5	0.8	20	0.4	8.0	1.50:1	30	SMA	OPD4-21-01/S
1.0-3.0	1.0	17	0.5	6.0	1.50:1	30	N	OPD4-05-01/N
1.0-3.0	0.9	18	0.5	6.0	1.50:1	30	SMA	OPD4-05-01/S
0.5-3.5	0.8	20	0.4	8.0	1.40:1	30	SMA	OPD4-15-01/S
1.0-4.0	1.0	20	0.4	6.0	1.50:1	30	SMA	OPD4-20-01/S
2.0-4.0	0.6	18	0.5	6.0	1.40:1	30	N	OPD4-06-01/N
2.0-4.0	0.6	20	0.5	6.0	1.40:1	30	SMA	OPD4-06-01/S
3.62-4.25	0.6	19	0.5	6.0	1.40:1	30	N	OPD4-07-01/N
3.62-4.25	0.6	19	0.5	6.0	1.35:1	30	SMA	OPD4-07-01/S
0.5-6.0	1.5	17	0.5	8.0	1.60:1	30	SMA	OPD4-16-01/S
5.8-6.45	0.6	19	0.5	6.0	1.40:1	30	N	OPD4-08-01/N
5.8-6.45	0.6	19	0.5	6.0	1.35:1	30	SMA	OPD4-08-01/S
0.5-8.0	1.8	18	0.5	6.0	1.50:1	30	SMA	OPD4-26-01/S
2.0-8.0	1.2	17	0.5	6.0	1.45:1	30	N	OPD4-09-01/N
2.0-8.0	1.0	18	0.5	6.0	1.45:1	30	SMA	OPD4-09-01/S
4.0-8.0	0.6	18	0.5	6.0	1.45:1	30	N	OPD4-10-01/N
4.0-8.0	0.6	19	0.5	6.0	1.45:1	30	SMA	OPD4-10-01/S

产品外形图

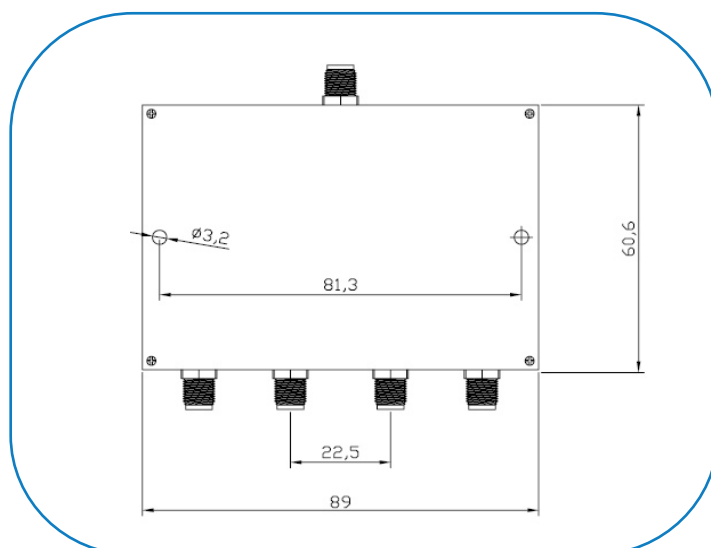

八路功分器 -0°

频率 范围 (GHz)	插入 损耗 (dB) MAX.	隔离 (dB) MIN.	幅度 平衡 (dB) MAX.	相位 平衡 (Deg) MAX.	VSWR MAX.	P/N
0.5-1.0	0.8	20	0.4	5.0	1.30:1	OPD8-01-01/N
0.5-1.0	0.8	20	0.4	5.0	1.30:1	OPD8-01-01/S
0.85-1.7	0.8	20	0.4	5.0	1.30:1	OPD8-02-01/N
0.85-1.7	0.8	20	0.4	5.0	1.30:1	OPD8-02-01/S
0.5-2.0	1.0	18	0.6	8.0	1.50:1	OPD8-19-01/N
0.5-2.0	1.0	18	0.6	8.0	1.50:1	OPD8-19-01/S
1.0-2.0	0.8	18	0.4	8.0	1.40:1	OPD8-03-01/N
1.0-2.0	0.8	20	0.4	5.0	1.35:1	OPD8-03-01/S
0.8-2.2	1.0	18	0.6	8.0	1.50:1	OPD8-14-01/S
1.0-3.0	1.0	16	0.6	8.0	1.50:1	OPD8-04-01/N
1.0-3.0	1.0	16	0.6	8.0	1.50:1	OPD8-04-01/S
2.0-4.0	0.8	17	0.4	8.0	1.45:1	OPD8-05-01/N
2.0-4.0	0.8	18	0.4	5.0	1.45:1	OPD8-05-01/S
3.625-4.25	1.0	18	0.5	9.0	1.40:1	OPD8-06-01/N
3.625-4.25	1.0	18	0.5	8.0	1.40:1	OPD8-06-01/S
0.5-6.0	1.5	20	0.4	8.0	1.40:1	OPD8-12-01/S
5.8-6.4	1.0	18	0.6	9.0	1.40:1	OPD8-07-01/N
5.8-6.4	1.0	18	0.6	8.0	1.40:1	OPD8-07-01/S
0.5-8.0	2.6	18	0.8	10.0	1.60:1	OPD8-18-01/S
2.0-8.0	1.4	16	0.7	10.0	1.60:1	OPD8-08-01/N
2.0-8.0	1.4	16	0.7	10.0	1.60:1	OPD8-08-01/S
4.0-8.0	1.4	16	0.6	10.0	1.60:1	OPD8-09-01/N
4.0-8.0	1.4	17	0.6	10.0	1.60:1	OPD8-09-01/S

产品外形图

